


WOLGAN VALLEY RAILWAY.

24M.10C.LOOP

NOT TO SCALE.

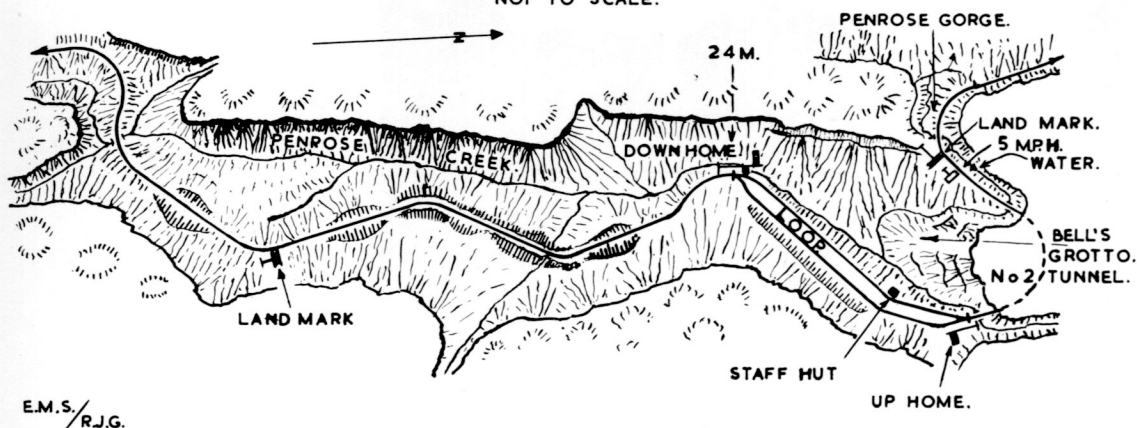

curves previously mentioned there was a timber loading siding, known as RODWELL'S BANK SIDING, so named after a ganger. Unfortunately the precise location of this siding has not been established and it would appear to have been installed after the construction of the line had been completed. Mention has been made that the

points were placed in the vicinity of the 23 mile peg and that the timber piles and girders for the construction of the trestle bridge over the Wolgan River at Newnes were obtained from the forests in this neighbourhood.

The still descending line entered another rock-walled chasm where it is obvious that much

Down direction warning board for 24 Mile Loop.

E.M. Stephens.

